

## **AXSxx-192-40**

**CWDM SFP+ Single-Mode for 10GbE  
Duplex SFP+ Transceiver  
RoHS 6 Compliant**

### **Features**

- ◆ Operating data rate up to 10.3Gbps
- ◆ Cooled EML transmitter and PIN receiver
- ◆ Distance up to 40km over SMF
- ◆ Single 3.3V Power supply and TTL Logic Interface
- ◆ Duplex LC Connector Interface
- ◆ Operating Case Temperature  
Standard: 0°C~+70°C
- ◆ Hot Pluggable
- ◆ Compliant with SFP+ MSA Specification SFF-8431
- ◆ Compliant with SFF-8472

### **Applications**

- ◆ 10GBase-ER/EW
- ◆ Custom High-speed Data Pipes
- ◆ Other Optical Links

## Regulatory Compliance

| Feature                                              | Standard                                                                           | Performance                                                                                                                                               |
|------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrostatic Discharge (ESD) to the Electrical Pins | MIL-STD-883G<br>Method 3015.7                                                      | Class 1C (>1000 V)                                                                                                                                        |
| Electrostatic Discharge To the enclosure             | EN 55024:1998+A1+A2<br>IEC-61000-4-2<br>GR-1089-CORE                               | Compliant with standards                                                                                                                                  |
| Electromagnetic Interference (EMI)                   | FCC Part 15 Class B<br>EN55022:2006<br>CISPR 22B :2006<br>VCCI Class B             | Compliant with standards                                                                                                                                  |
| Immunity                                             | EN 55024:1998+A1+A2<br>IEC 61000-4-3                                               | Compliant with standards. 1kHz sine-wave, 80% AM, from 80 MHz to 1 GHz. No effect on transmitter/receiver performance is detectable between these limits. |
| Laser Eye Safety                                     | FDA 21CFR 1040.10 and 1040.11<br>EN (IEC) 60825-1:2007<br>EN (IEC) 60825-2:2004+A1 | CDRH compliant and Class I laser product.                                                                                                                 |
| Component Recognition                                | UL and CUL<br>EN60950-1:2006                                                       | Compliant with standards                                                                                                                                  |
| RoHS6                                                | 2002/95/EC 4.1&4.2<br>2005/747/EC 5&7&13                                           | Compliant with standards <sup>note1</sup>                                                                                                                 |

Note1: For update of the equipments and strict control of raw materials, 10Gtek has the ability to supply the customized products since Jan 1st, 2007, which meets the requirements of RoHS6 (Restrictions on use of certain Hazardous Substances) of European Union.

In light of item 5 in RoHS exemption list of RoHS Directive 2002/95/EC, Item 5: Lead in glass of cathode ray tubes, electronic components and fluorescent tubes.

In light of item 13 in RoHS exemption list of RoHS Directive 2005/747/EC, Item 13: Lead and cadmium in optical and filter glass. The three exemptions are being concerned for 10Gtek's transceivers, because 10Gtek's transceivers use glass, which may contain Pb, for components such as lenses, isolators, and other electronic components.

## Product Description

The AXS\*\*-192-40 series single mode transceiver is SFP+ module for duplex optical data communications such as 10GBase-ER/EW.

It is with the SFP+ 20-pin connector to allow hot plug capability. Digital diagnostic functions are available via an I<sup>2</sup>C. The transceiver module comprises a transmitter with a EML laser and a receiver with a PIN photodiode. Transmitter and receiver are separate within a wide temperature range of 0 to +70°C and offers optimum heat dissipation and excellent electromagnetic shielding thus enabling high port densities for 10 GbE systems.

## Absolute Maximum Ratings<sup>note2</sup>

| Parameter                  | Symbol     | Min. | Max. | Unit |
|----------------------------|------------|------|------|------|
| Storage Temperature        | $T_S$      | -40  | +85  | °C   |
| Operating Case Temperature | $T_{case}$ | 0    | 70   | °C   |
| Supply Voltage             | $V_{CC}$   | -0.5 | 3.6  | V    |

Note2: Exceeding any one of these values may destroy the device permanently.

## Recommended Operating Conditions

| Parameter                  | Symbol      | Min. | Typical   | Max. | Unit  |
|----------------------------|-------------|------|-----------|------|-------|
| Operating Case Temperature | $T_A$       | 0    |           | +70  | °C    |
| Power Supply Voltage       | $V_{CC}$    | 3.14 | 3.3       | 3.46 | V     |
| Power Supply Current       | $I_{CC}$    |      |           | 300  | mA    |
| Surge Current              | $I_{Surge}$ |      |           | +30  | mA    |
| Baud Rate                  |             |      | 9.95/10.3 |      | GBaud |

## Performance Specifications - Electrical

| Parameter                       | Symbol    | Min. | Typ. | Max          | Unit | Notes                                       |
|---------------------------------|-----------|------|------|--------------|------|---------------------------------------------|
| <b>Transmitter</b>              |           |      |      |              |      |                                             |
| CML Inputs(Differential)        | $V_{in}$  | 150  |      | 1200         | mVpp | AC coupled inputs                           |
| Input Impedance (Differential)  | $Z_{in}$  | 85   | 100  | 115          | ohms | $R_{in} > 100 \text{ kohms @ DC}$           |
| Tx_DISABLE Input Voltage – High |           | 2    |      | 3.46         | V    |                                             |
| Tx_DISABLE Input Voltage – Low  |           | 0    |      | 0.8          | V    |                                             |
| Tx_FAULT Output Voltage - High  |           | 2    |      | $V_{CC}+0.3$ | V    | $I_o = 400\mu\text{A}; \text{Host } V_{CC}$ |
| Tx_FAULT Output Voltage – Low   |           | 0    |      | 0.5          | V    | $I_o = -4.0\text{mA}$                       |
| <b>Receiver</b>                 |           |      |      |              |      |                                             |
| CML Outputs (Differential)      | $V_{out}$ | 350  |      | 700          | mVpp | AC coupled outputs                          |
| Output Impedance (Differential) | $Z_{out}$ | 85   | 100  | 115          | ohms |                                             |
| Rx_LOS Output Voltage - High    |           | 2    |      | $V_{CC}+0.3$ | V    | $I_o = 400\mu\text{A}; \text{Host } V_{CC}$ |
| Rx_LOS Output Voltage - Low     |           | 0    |      | 0.8          | V    | $I_o = -4.0\text{mA}$                       |
| MOD_DEF ( 0:2 )                 | VoH       | 2.5  |      |              | V    | With Serial ID                              |
|                                 | VoL       | 0    |      | 0.5          | V    |                                             |



## Optical and Electrical Characteristics

| Parameter                             | Symbol          | Min. | Typical   | Max.         | Unit     |
|---------------------------------------|-----------------|------|-----------|--------------|----------|
| SMF                                   |                 |      | 40        |              | km       |
| Data Rate                             |                 |      | 9.95/10.3 |              | Gbps     |
| <b>Transmitter</b>                    |                 |      |           |              |          |
| Centre Wavelength                     | $\lambda_C$     | 1470 |           | 1610         | nm       |
| Spectral Width (-20dB)                | $\Delta\lambda$ |      |           | 1            | nm       |
| Average Output Power <sup>note3</sup> | $P_{out, AVG}$  | -1   |           | 2            | dBm      |
| Extinction Ratio                      | ER              | 3.5  |           |              | dB       |
| Side Mode Suppression Ratio           | SMSR            | 30   |           |              | dB       |
| Transmitter and Dispersion Penalty    | TDP             |      |           | -6.2         | dB       |
| Average Power of OFF Transmitter      |                 |      |           | -30          | dBm      |
| Relative Intensity Noise              | RIN             |      |           | -128         | dB/Hz    |
| Input Differential Impedance          | $Z_{IN}$        | 90   | 100       | 110          | $\Omega$ |
| TX Disable                            | Disable         |      | 2.0       | $V_{CC}+0.3$ | V        |
|                                       | Enable          |      | 0         | 0.8          |          |
| TX Fault                              | Fault           |      | 2.0       | $V_{CC}+0.3$ | V        |
|                                       | Normal          |      | 0         | 0.8          |          |
| TX Disable Assert Time                | $t_{off}$       |      |           | 10           | $\mu$ us |
| <b>Receiver</b>                       |                 |      |           |              |          |
| Centre Wavelength                     | $\lambda_C$     | 1260 |           | 1610         | nm       |
| Sensitivity <sup>note4</sup>          | PIN             |      |           | -14          | dBm      |
| Receiver Overload                     | $P_{MAX}$       | 0.5  |           |              | dBm      |
| Output Differential Impedance         | $P_{IN}$        | 90   | 100       | 110          | $\Omega$ |
| LOS De-Assert                         | $LOS_D$         |      |           | -14          | dBm      |
| LOS Assert                            | $LOS_A$         | -30  |           |              | dBm      |
| LOS                                   | High            |      | 2.0       | $V_{CC}+0.3$ | V        |
|                                       | Low             |      | 0         | 0.8          |          |

Note3: Output is coupled into a 9/125um SMF.

Note4: Measured with worst ER, BER less than 1E-12 and PRBS 2<sup>31</sup>-1 at 10.3125Gbps.

## SFP+ Transceiver Electrical Pad Layout

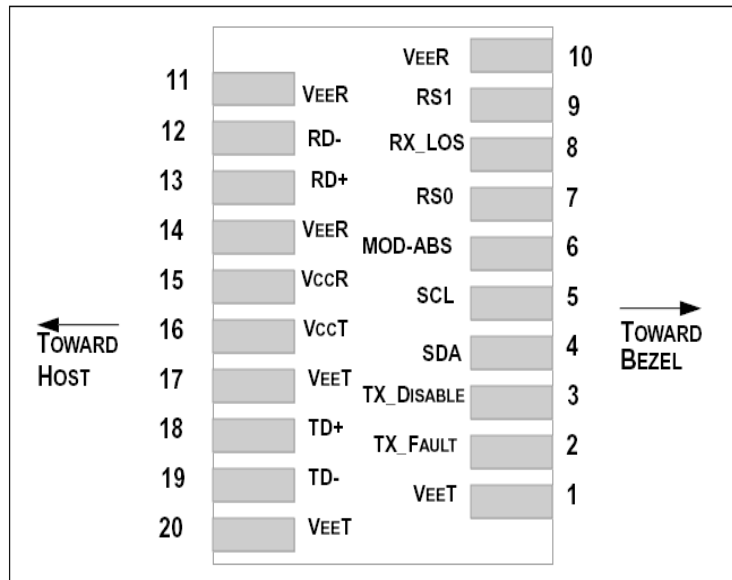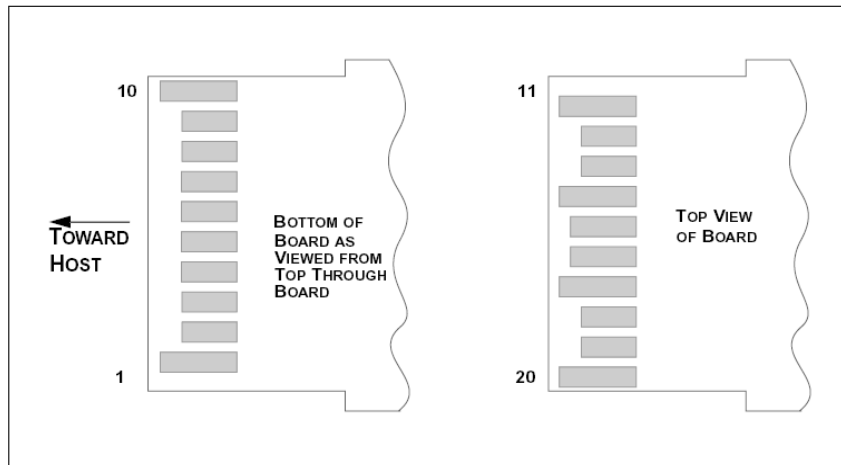

### Pin Function Definitions

| Pin Num. | Name       | FUNCTION                     | Plug Seq. | Notes                                  |
|----------|------------|------------------------------|-----------|----------------------------------------|
| 1        | VeeT       | Transmitter Ground           | 1         | Note9                                  |
| 2        | TX Fault   | Transmitter Fault Indication | 3         | Note5                                  |
| 3        | TX Disable | Transmitter Disable          | 3         | Note6, Module disables on high or open |
| 4        | SDA        | Module Definition 2          | 3         | Note7, Data line for Serial ID.        |
| 5        | SCL        | Module Definition 1          | 3         | Note7, Clock line for Serial ID.       |
| 6        | MOD_ABS    | Module Definition 0          | 3         | Note 3                                 |

|    |      |                          |   |                                                                                                            |
|----|------|--------------------------|---|------------------------------------------------------------------------------------------------------------|
| 7  | RS0  | RX Rate Select (LVTTTL). | 3 | This pin has an internal 30k pull down to ground. A signal on this pin will not affect module performance. |
| 8  | LOS  | Loss of Signal           | 3 | Note8                                                                                                      |
| 9  | RS1  | TX Rate Select (LVTTTL). | 1 | This pin has an internal 30k pull down to ground. A signal on this pin will not affect module performance. |
| 10 | VeeR | Receiver Ground          | 1 | Note9                                                                                                      |
| 11 | VeeR | Receiver Ground          | 1 | Note9                                                                                                      |
| 12 | RD-  | Inv. Received Data Out   | 3 | Note10                                                                                                     |
| 13 | RD+  | Received Data Out        | 3 | Note10                                                                                                     |
| 14 | VeeR | Receiver Ground          | 1 | Note9                                                                                                      |
| 15 | VccR | Receiver Power           | 2 | 3.3 ± 5%, Note11                                                                                           |
| 16 | VccT | Transmitter Power        | 2 | 3.3 ± 5%, Note11                                                                                           |
| 17 | VeeT | Transmitter Ground       | 1 | Note9                                                                                                      |
| 18 | TD+  | Transmit Data In         | 3 | Note12                                                                                                     |
| 19 | TD-  | Inv. Transmit Data In    | 3 | Note12                                                                                                     |
| 20 | VeeT | Transmitter Ground       | 1 | Note9                                                                                                      |

Note5: TX Fault is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor on the host board. Pull up voltage between 2.0V and VccT, R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.

Note6: TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10 KΩ resistor. Its states are:

Low (0 – 0.8V): Transmitter on

(>0.8, < 2.0V): Undefined

High (2.0 – 3.465V): Transmitter Disabled

Open: Transmitter Disabled

Note7: Modulation Absent, connected to VEET or VEER in the module.

Note8: LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor. Pull up voltage between 2.0V and VccT, R+0.3V. When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to <0.8V.

Note9: VeeR and VeeT may be internally connected within the SFP+ module.

Note10: RD-/+ : These are the differential receiver outputs. They are AC coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board. The voltage swing on these lines will be between 350 and 700 mV differential (175 –350 mV single ended) when properly terminated.


Note11: VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V ±5% at the SFP+ connector pin. Maximum supply current is 300mA. Recommended host board power supply filtering is shown below. Inductors with DC resistance of less than 1 ohm should be used in

order to maintain the required voltage at the SFP+ input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP+ transceiver module will result in an inrush current of no more than 30mA greater than the steady state value. VccR and VccT may be internally connected within the SFP+ transceiver module.


Note12: TD-/+ : These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board. The inputs will accept differential swings of 150 – 1200 mV (75 – 600mV single-ended).

## EEPROM

The serial interface uses the 2-wire serial CMOS EEPROM protocol defined for the ATMEL AT24C02/04 family of components. When the serial protocol is activated, the host generates the serial clock signal (SCL). The positive edge clocks data into those segments of the EEPROM that are not writing protected within the SFP+ transceiver. The negative edge clocks data from the SFP+ transceiver. The serial data signal (SDA) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The Module provides diagnostic information about the present operating conditions. The transceiver generates this diagnostic data by digitization of internal analog signals. Calibration and alarm/warning threshold data is written during device manufacture. Received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring all are implemented. If the module is defined as external calibrated, the diagnostic data are raw A/D values and must be converted to real world units using calibration constants stored in EEPROM locations 56 – 95 at wire serial bus address A2h. The digital diagnostic memory map specific data field define as following. For detail EEPROM information, please refer to the related document of SFF 8472 Rev10.2.

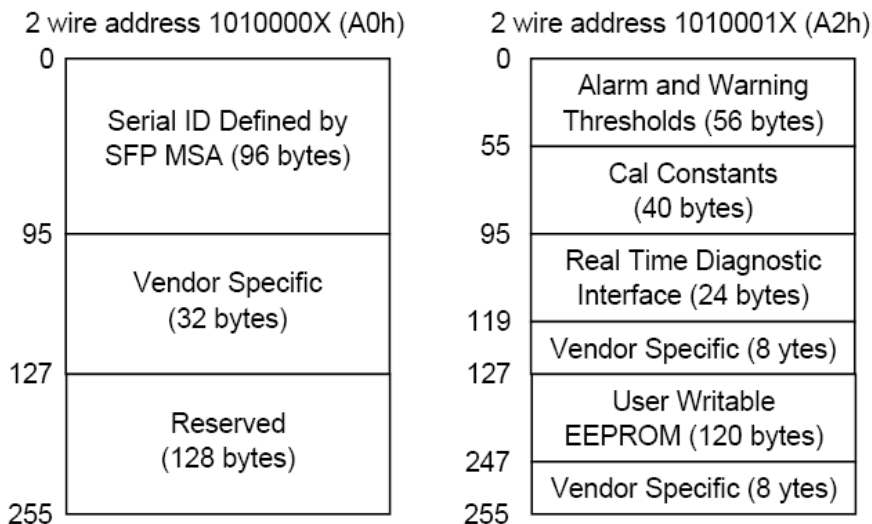


## Recommend Circuit Schematic

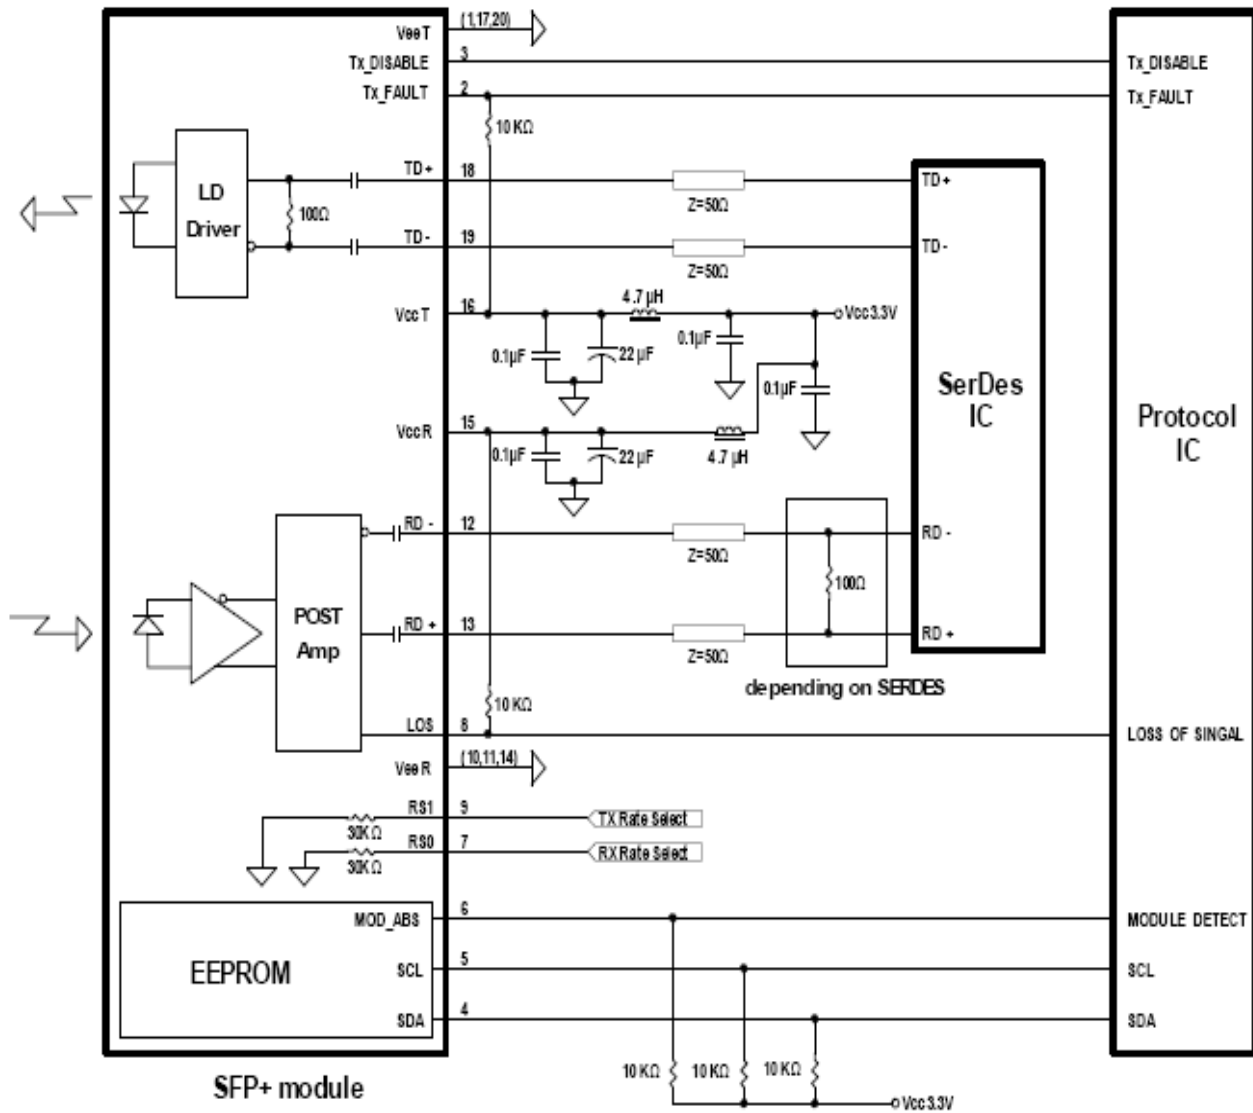



### Mechanical Specifications

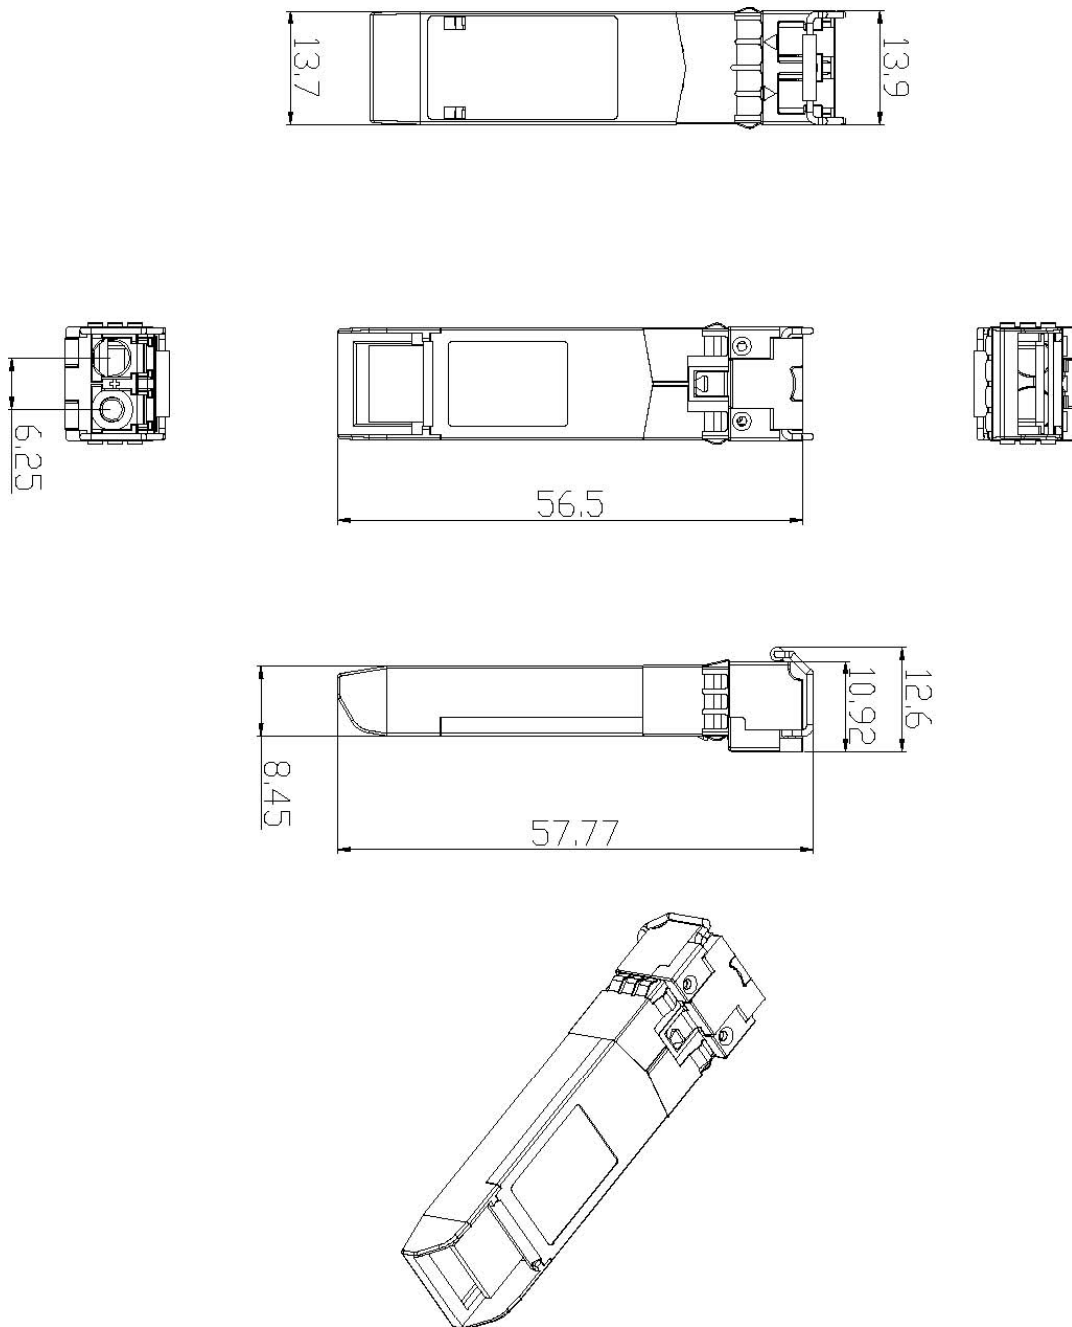

## Revision History

| Revision | Initiated | Approved | content  | Release Date |
|----------|-----------|----------|----------|--------------|
| Ver1.0   | Jacky     | Nicky    | Released | Dec/2011     |
|          |           |          |          |              |
|          |           |          |          |              |

## Ordering information

| Part No.     | Data Rate | Laser       | Fibre Type | Temp. | Distance | Optical Interface | DDMI |
|--------------|-----------|-------------|------------|-------|----------|-------------------|------|
| AXS**-192-40 | 10Gbps    | CWDM<br>EML | SMF        | 0~70℃ | 40km     | LC                | YES  |

## Obtaining Document

10GTEK TRANSCEIVERS CO., LTD  
 7 Floor, Anlewuye Building,  
 Shunfeng Road, Baoan District,  
 Shenzhen, P R. of China.

*Phone:* +86-755-29988377

*Fax:* +86-755-61624140

More information about 10GTEK's complete range of High Speed Cables and Fiber Optic Cables can be found on [WWW.10GTEK.COM](http://WWW.10GTEK.COM) or E-mail: [support@10gtek.com](mailto:support@10gtek.com)